

All-Glass Ballistic Doors

Clear sightlines. Minimal framing. Interior protection.

Bring ballistic protection into executive offices, conference rooms, and other low-traffic interior spaces. Full-vision glass and slim top and bottom rails create a clean architectural appearance.

Construction & Configuration

- Glass-clad polycarbonate (GCP) glazing, 1-1/4 inch thick.
- Single and paired door configurations.
- Maximum door size: 3'6" wide × 9'0" high.
- Reference weight: approximately 300 lb for a 3'0" × 7'0" door.
- 4-inch tapered top and bottom rails.
- Fixed sidelites available.


Hardware & Finishes

- Jackson 900 Series heavy-duty floor closer or Jackson 1000 Series heavy-duty overhead concealed closer.
- Maglocks and ladder pull bars available.
- Satin anodized and black bronze anodized finishes; brushed or polished stainless-steel cladding.
- Exit devices / push bars are not available for this configuration.


Protection & Intended Use

- UL 752 Level 3 glazing specification.
- Interior applications; designed for approximately 24-30 daily cycles.
- Coordinate access control and egress requirements with the project design team.

SINGLE DOOR & RAIL DETAILS

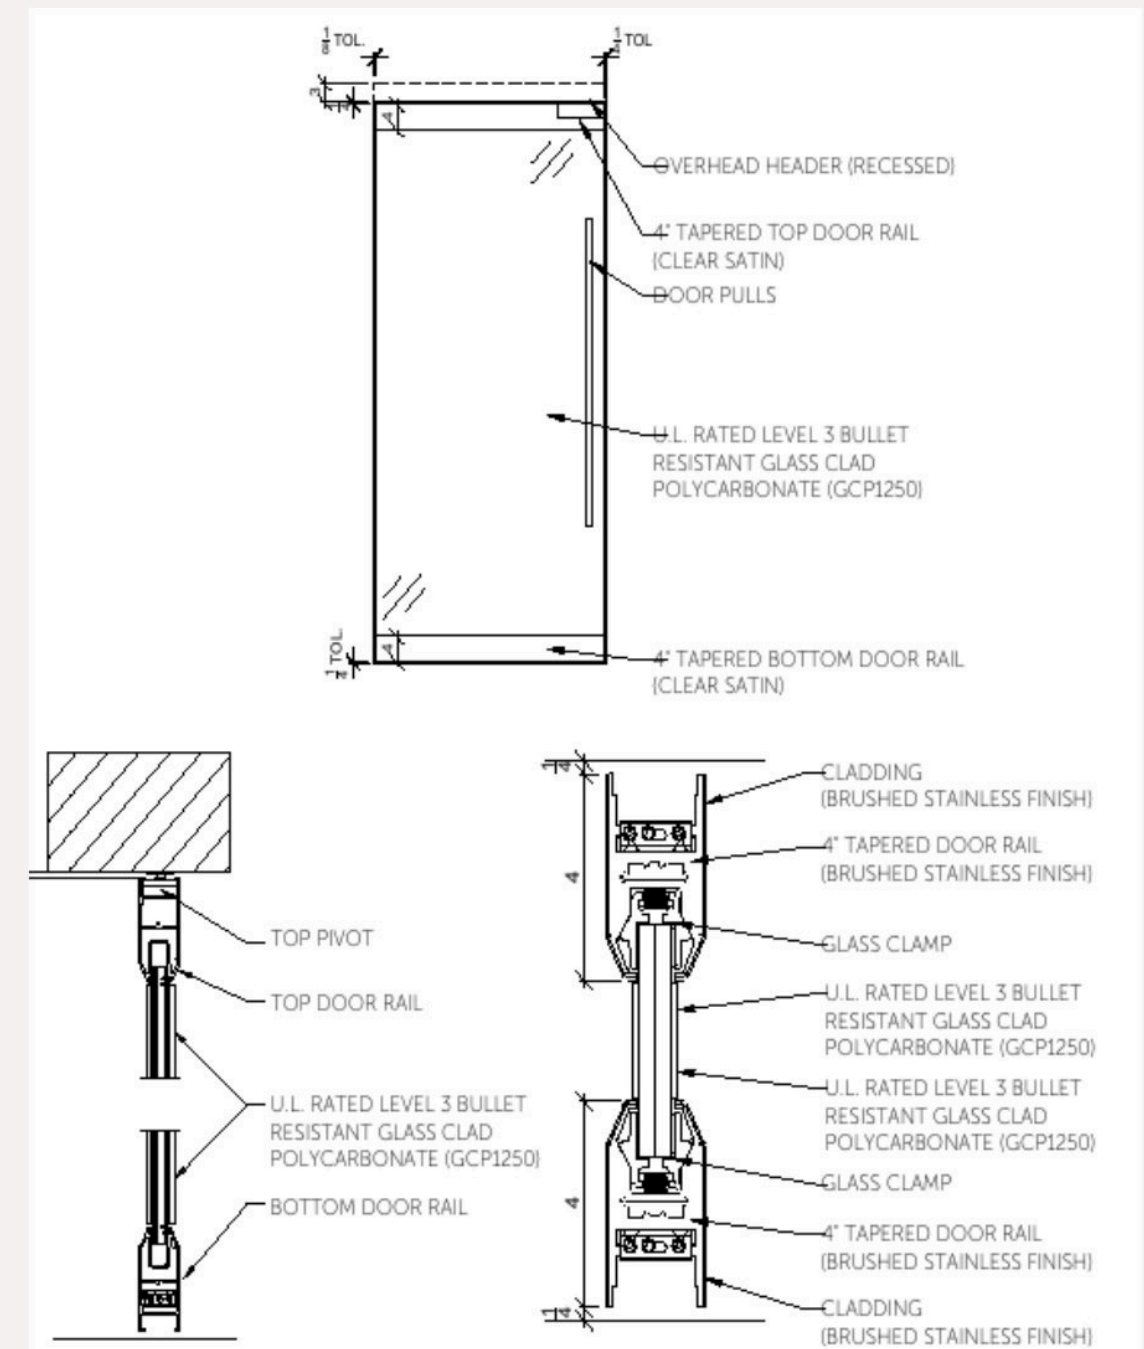

PAIRED DOOR

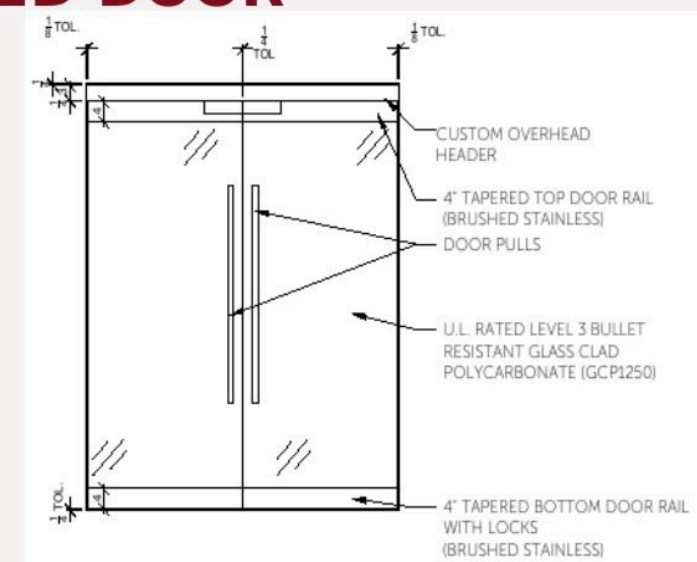

Drawings illustrate the referenced configuration.

Project-specific confirmation required: specifications adapted from the supplied reference sheet. Confirm ABR assembly testing, applicable UL 752 edition, available sizes, hardware, and finishes before specification or order. Glazing performance alone does not establish a complete assembly rating.